EU Type Examination Certificate Number: **0120/SGS0288**

Zhejiang Eastron Electronic Co., Ltd.

No. 1369, Chengnan Road,
Jiaxing,
Zhejiang,
China,
314001

Instrument Identification:

Smart X96-1, Smart X96-1E, Smart X96-5 & Smart X96-5E

Polyphase, Active Import/Export (kWh), Indoor, Transformer Operated, Multi-function, Electricity Meter

Instrument Traceable Number
0120/SGS0288

has been assessed and certified as meeting the requirements of

EU Directive 2014/32/EU

on Measuring Instruments Annex II, Module B

It is certified that the manufacturer's technical design and specimen for the above instrument has been examined and, based on the evidence submitted, it is considered that the instrument conforms to the requirements of Annex V of EU Directive 2014/32/EU

This certificate must be used in conjunction with a certificate covering the product verification as required in Annex II, Module D or Annex II, Module F

This certificate is valid for 10 years from 24th April 2017 until 23rd April 2027
Issue 4

Certification is based on report number(s) EMA234440/2 dated 24th April 2017

Authorised Signature

SGS United Kingdom Limited, Notified Body 0120
Unit 202B Worle Parkway, Weston-super-Mare, BS22 6WA, UK
t +44 (0)1934 522917 f +44 (0)1934 522137 www.sgs.com

Contact Address
SGS United Kingdom Limited, Units 12A & 12B, South Industrial Estate, Bowburn, Durham, DH6 5AD, UK
t +44 (0)191 377 2000 f +44 (0)191 377 2020 www.sgs.com

EU Type Examination Cert.

SGSPAPER
19356452

1. Technical Data

Manufacturer	Zhejiang Eastron Electronic Co., Ltd.
Meter Type	Smart X96-1, Smart X96-1E, Smart X96-5, Smart X96-5E
Voltage Rating *(Un)*	1P2W: 230V 3P3W: 3x230V 3P4W: 3 x 230/400V
Current Rating *(Imin – Iref (Imax))*	Smart X96-5, Smart X96-5E: 0.25-5(6)A Smart X96-1, Smart X96-1E: 100mA/5(6)A
Frequency *(Fn)*	50Hz
Active Accuracy Class *(kWh)*	B or C (kWh)
Type of circuit	1p2w, 3p3w, 3p4w
Temperature Range	-25ºC to +55ºC
Software/ Firmware Version No **CRC Checksum** **Identification Location**	V1.3 0x0059DD5E LCD
Bill Of Materials Number	DH-JS-160010-1.3
IP Rating	IP51 Front Display Meter body not rated. Must be installed in a suitable IP rated enclosure
Insulation Protective Class	Class I / Class II
LED Pulse Constant	3200imp/ kWh
Impulse Voltage Rating	6kV
AC Voltage Rating	4kV
Main Cover Sealing Type	Wire & Crimp Laser Welded
Integrity of meter	Inaccessible without breaking seals
Intended Location of the Meter	Indoor
Type of Register	LCD
Terminal Arrangement(s)	DIN
Location of Manufacturers Address	Associated Documents

2. Photograph of Meter and Sealing Plan

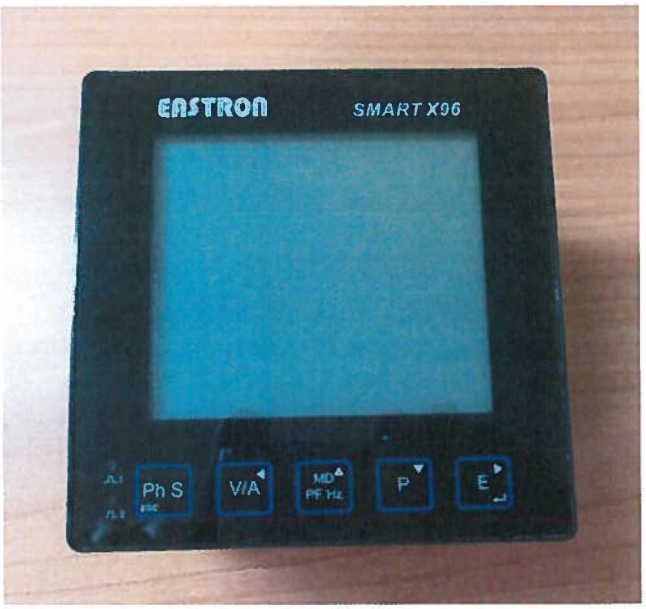

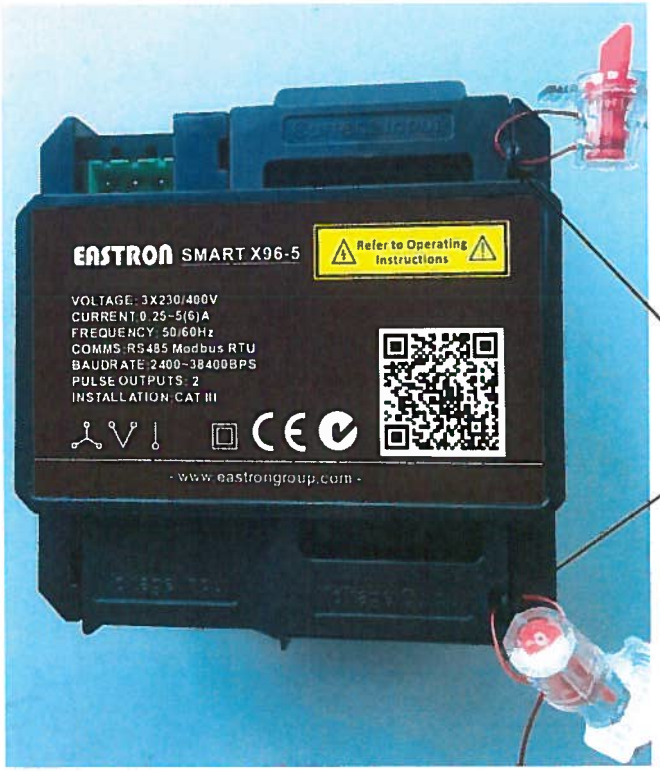

Terminal covers sealing points

3. Examples of Nameplates

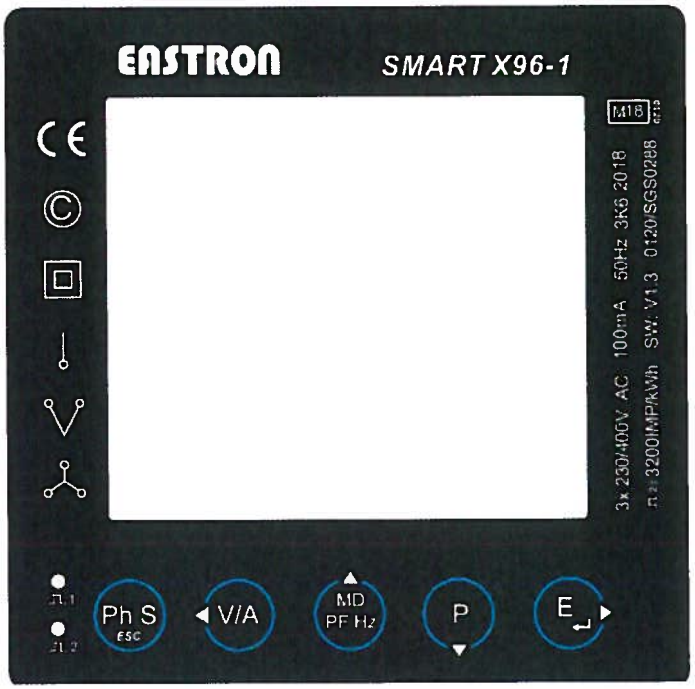

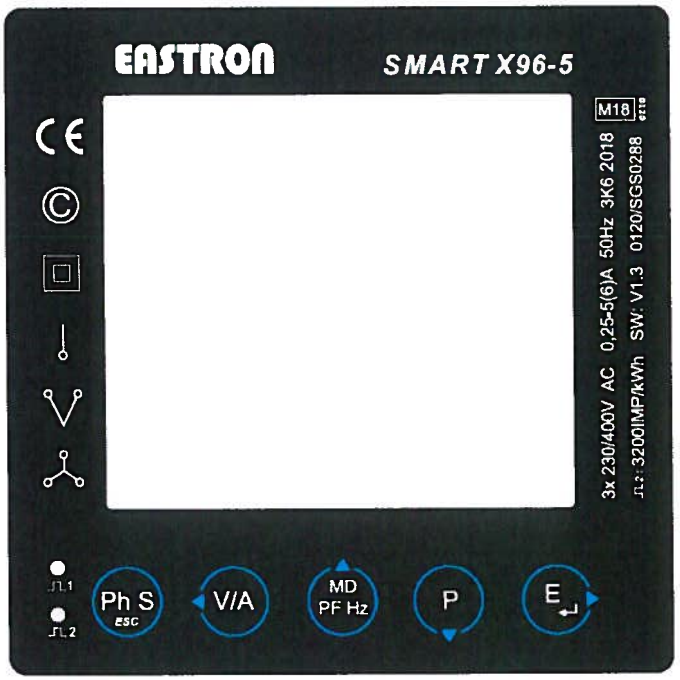

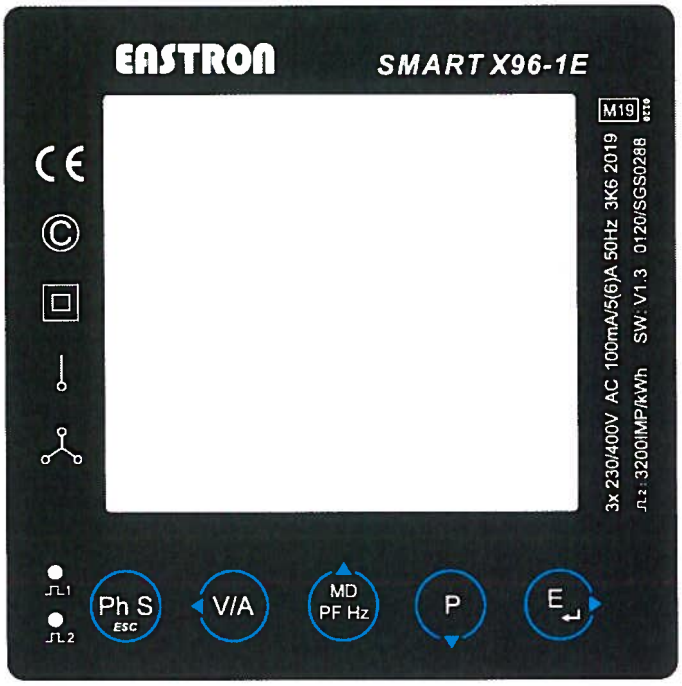
EASTRON
SMART X96-1E
M19
3x 230/400V AC 100mA/5(6)A 50Hz 3K6 2019
3200IMP/kWh SW: V1.3 0120/SGS0288
Ph S
ESC
V/A
MD
PF Hz
P
E

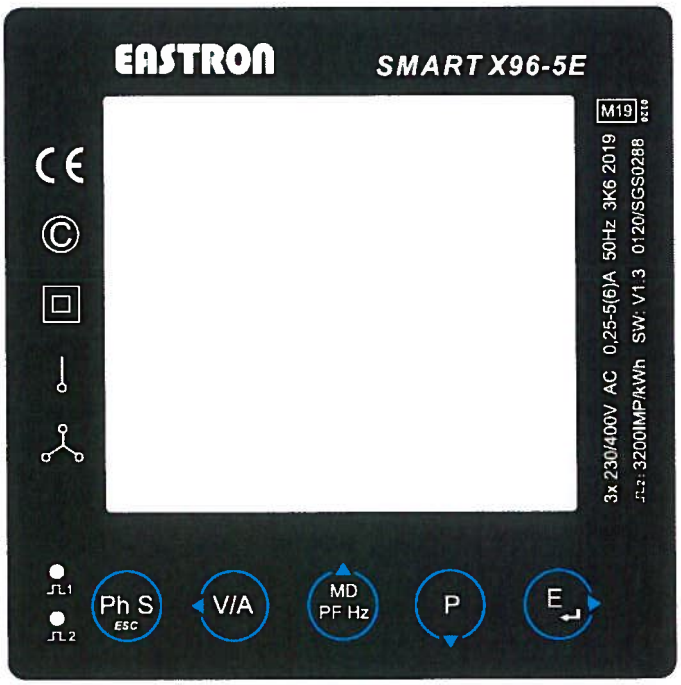
EASTRON
SMART X96-5E
M19
3x 230/400V AC 0,25-5(6)A 50Hz 3K6 2019
3200IMP/kWh SW: V1.3 0120/SGS0288
Ph S
ESC
V/A
MD
PF Hz
P
E

4. Calculation of the composite error/ MPE

During the type approval examination the influence factors for temperature, frequency and voltage are determined per load point. The table below represents the sum of the square values per load, determined via the following formula:-

$$\delta e\,(T, U, f) = \sqrt{(\delta e^2\,(T, I, \cos\varphi)\,,\ \delta e^2\,(U, I, \cos\varphi)\,,\ \delta e^2\,(f, I, \cos\varphi))}$$

where

$\delta e(T, I, \cos\varphi)$	=	Additional error due to variation of the temperature at the same load
$\delta e(U, I, \cos\varphi)$	=	Additional error due to variation of the voltage at the same load
$\delta e(f, I, \cos\varphi)$	=	Additional error due to variation of the frequency at the same load

		Influence Factors for Temperature. Frequency & Voltage					
Current	**PF Cos**	-25°C	-10°C	5°C	30°C	40°C	55°C
Imin	1.0	0.21	0.20	0.14	0.07	0.19	0.39
Itr	1.0	0.25	0.24	0.20	0.10	0.17	0.37
10Itr	1.0	0.24	0.23	0.19	0.10	0.20	0.39
Imax	1.0	0.24	0.24	0.18	0.10	0.18	0.39
Itr	0.5ind	0.25	0.25	0.21	0.10	0.19	0.44
10Itr	0.5ind	0.20	0.06	0.11	0.31	0.56	0.70
Imax	0.5ind	0.23	0.19	0.10	0.36	0.51	0.51
Itr	0.8cap	0.25	0.25	0.20	0.12	0.18	0.37
10Itr	0.8cap	0.35	0.30	0.23	0.09	0.11	0.33
Imax	0.8cap	0.33	0.29	0.27	0.16	0.18	0.30
L1							
Itr	1.0	0.19	0.17	0.11	0.08	0.19	0.40
10Itr	1.0	0.18	0.17	0.11	0.10	0.20	0.41
Imax	1.0	0.18	0.16	0.10	0.10	0.20	0.40
Itr	0.5ind	0.21	0.19	0.13	0.07	0.20	0.45
10Itr	0.5ind	0.23	0.22	0.17	0.12	0.18	0.39
Imax	0.5ind	0.19	0.17	0.13	0.09	0.19	0.41
L2							
Itr	1.0	0.35	0.35	0.31	0.19	0.21	0.40
10Itr	1.0	0.29	0.30	0.25	0.16	0.22	0.47
Imax	1.0	0.30	0.30	0.27	0.15	0.20	0.43
Itr	0.5ind	0.31	0.32	0.28	0.16	0.16	0.35
10Itr	0.5ind	0.74	0.14	0.33	0.77	0.46	0.92
Imax	0.5ind	0.33	0.34	0.37	0.63	0.47	1.19
L3							
Itr	1.0	0.16	0.15	0.10	0.08	0.19	0.40
10Itr	1.0	0.18	0.16	0.10	0.10	0.20	0.41
Imax	1.0	0.17	0.16	0.10	0.11	0.21	0.41
Itr	0.5ind	0.17	0.20	0.17	0.12	0.26	0.58
10Itr	0.5ind	0.18	0.18	0.11	0.36	0.40	0.62
Imax	0.5ind		0.15	0.08	0.62	0.37	0.57

5. Annex of Variants

Product Variant Identification Details:

Type Designation	Description of meter
Smart X96-1	Active Import/Export (kWh), 3x230/400V, 100mA/5(6)A, Transformer operated, Multifunction, RS485 Modbus RTU
Smart X96-1E	Active Import/Export (kWh), 3x230/400V, 100mA/5(6)A, Transformer operated, Multifunction, RS485 Modbus RTU. Max baud rate 9600, No THD or Max Demand
Smart X96-5	Active Import/Export (kWh), 3x230/400V, 5(6)A, Transformer operated, Multifunction, RS485 Modbus RTU
Smart X96-5E	Active Import/Export (kWh), 3x230/400V, 5(6)A, Transformer operated, Multifunction, RS485 Modbus RTU. Max baud rate 9600, No THD or Max Demand

Modifications to the meter(s) described according to approval No.**0120/SGS0288** must be notified to the issuing body to confirm the meter(s) continuing compliance to the relevant pattern approval standard(s).

6. Document Revision History

Issue	Date	Comments
1	24/04/2017	Initial Issue
2	27/09/2018	Model Smart X96-1 added to approved types.
3	17/12/2018	Models Smart X96-1E and Smart X96-5E added to approved types
4	22/01/2019	Smart X96-1E and Smart X96-5E nameplates updated

END OF CERTIFICATE